



Free-standing luminaire YARA.single YAS 15000/VTL/RX/WS/CEE/S0/C

114268000-00808358

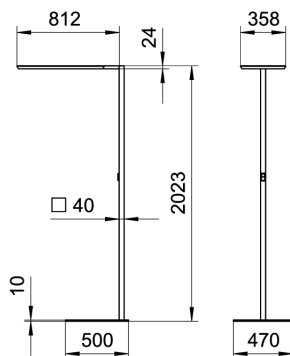

D43 ↓ 13.0% ↑ 87.0%

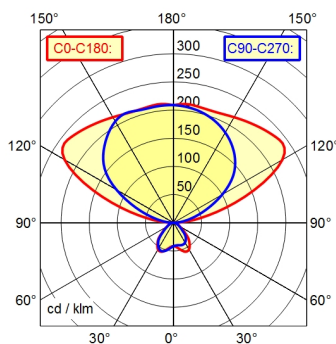

light source
work equipment
connected load
power consumption
power factor
luminous flux
luminous efficiency
light type/-color
colour temperatur
color rendering index
light distribution
direct ratio
chromaticity tolerance LED
glare control
luminance (L65)
unified glare rating (4H 8H)
system of protection
class of protection
technology
operation
housing
Light source cover
arm
luminaire base
weight (net)
mains lead
fastening
life expectancy LED
special features

LED
electronic ballast DALI
220 - 240 V; AC; 50 Hz; 60 Hz
ca. 107 W
env. 0,966
approx. 15.000 lm
approx. 140 lm/W
dynamic white; warm white; daylight
approx. 2.700 - 6.500 K
CRI ≥ 80
direct/indirect
approx. 13 %
< 3 SDCM
conical prismatic screen
≤ 2.700 cd/m²
≤ 16
IP 20
I
Multiple daylight-dependent motion sensors; DALI;
Touch DIM
wireless switch
aluminium/plastic; 8; white
Acrylic (PMMA); structured; satine
steel tube; powder-coated; tubular section upright;
white
C-form flat
ca. 18 kg
ca. 3 m; mains plug; CEE 7/VII
floor standing base
L80B50 60.000h
asymmetric radiation; Flicker-free; App control;
Optional LTX Cloud connection; Direct and indirect
lighting component with edge light and light
guide technology for a homogeneous light exit;
LTX multisensor for workplace optimisation; TALK
Bluetooth; Biodynamic light VTL; magnetic control
panel, freely positionable